


SPEARHEAD

DESTROYER FLAIL HD



DESTROYER FLAIL HD FEATURES

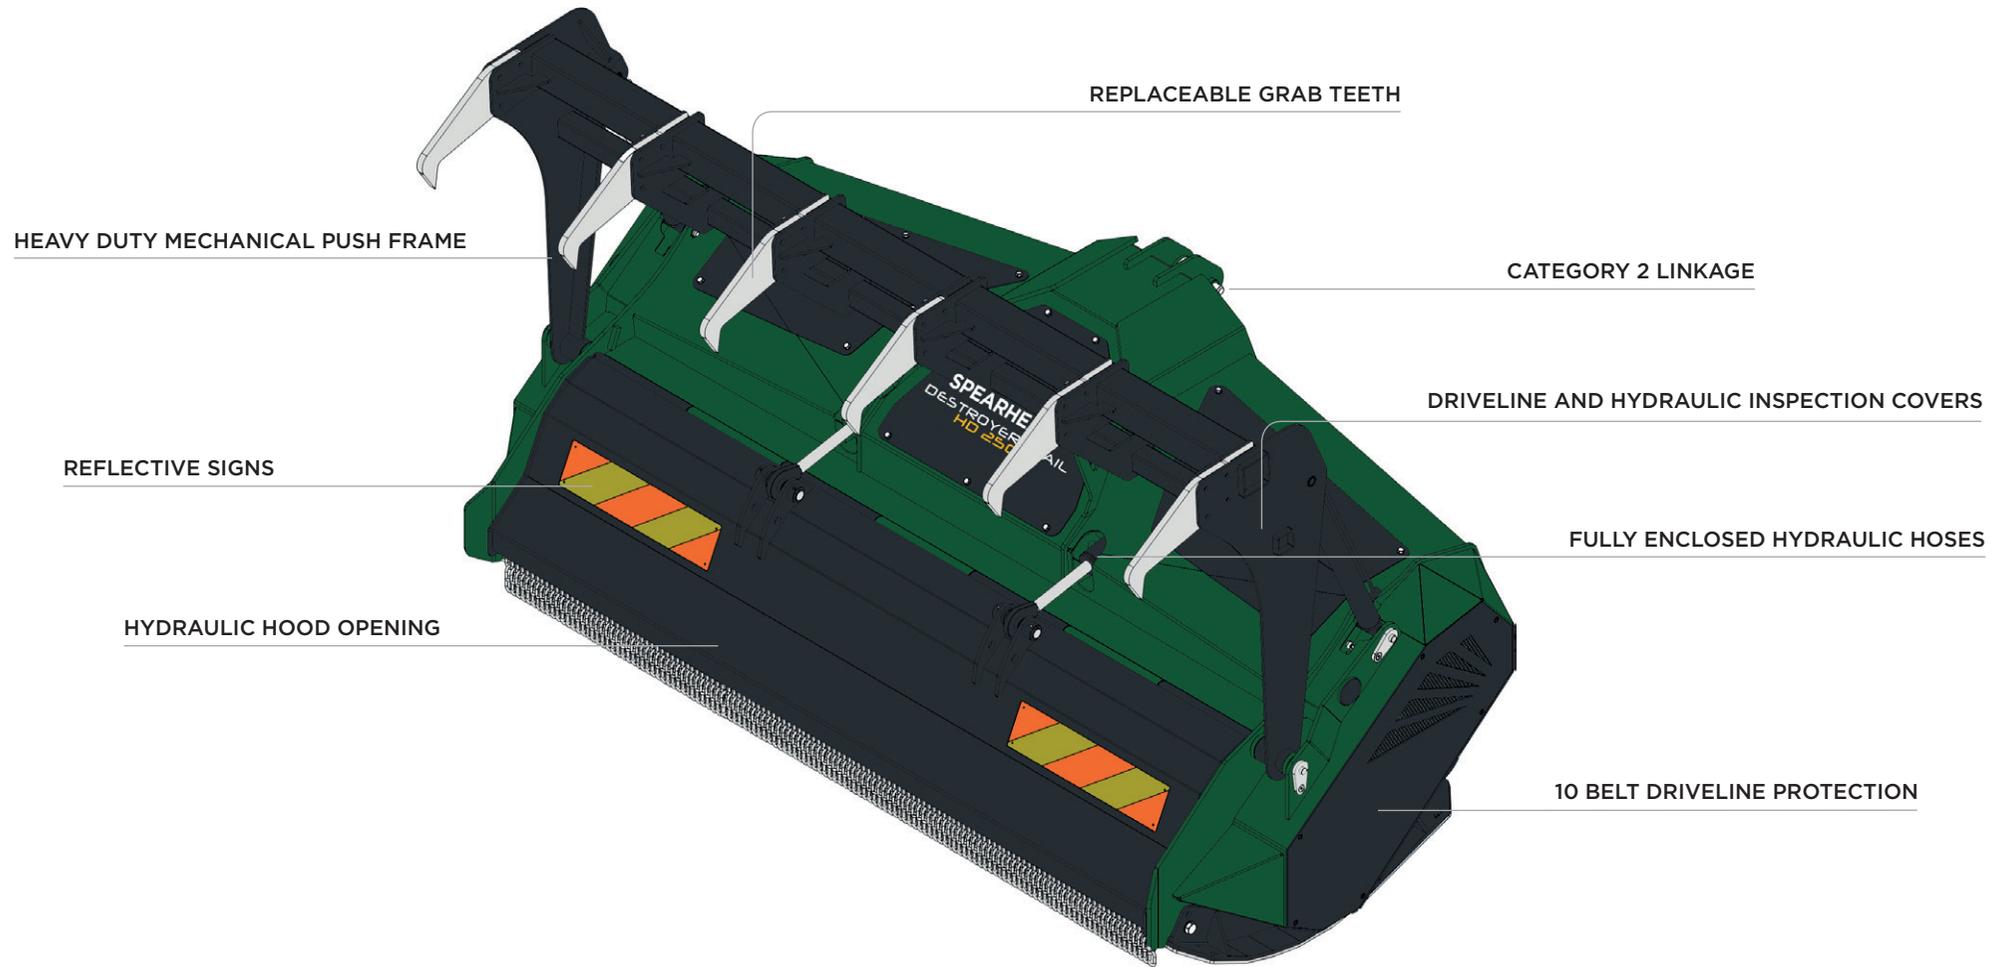

TRACTOR HP

80hp (60kW)



PTO SPEED

1000rpm



TRANSPORT WIDTH

2.95m (9' 7")



3 POINT LINKAGE MOUNTING



CUTTING WIDTH

2.50m (8' 2")



TOOTH TYPE

Heavy Duty



NO. OF TEETH

72



CUTTING HEIGHT

40mm - 80mm
(1.6" - 3.2")

DESTROYER FLAIL HD250F

ULTIMATE POWER THROUGH DENSE SCRUB



HEAVY SCRUB




FORESTRY



AIRFIELD



WATERWAYS

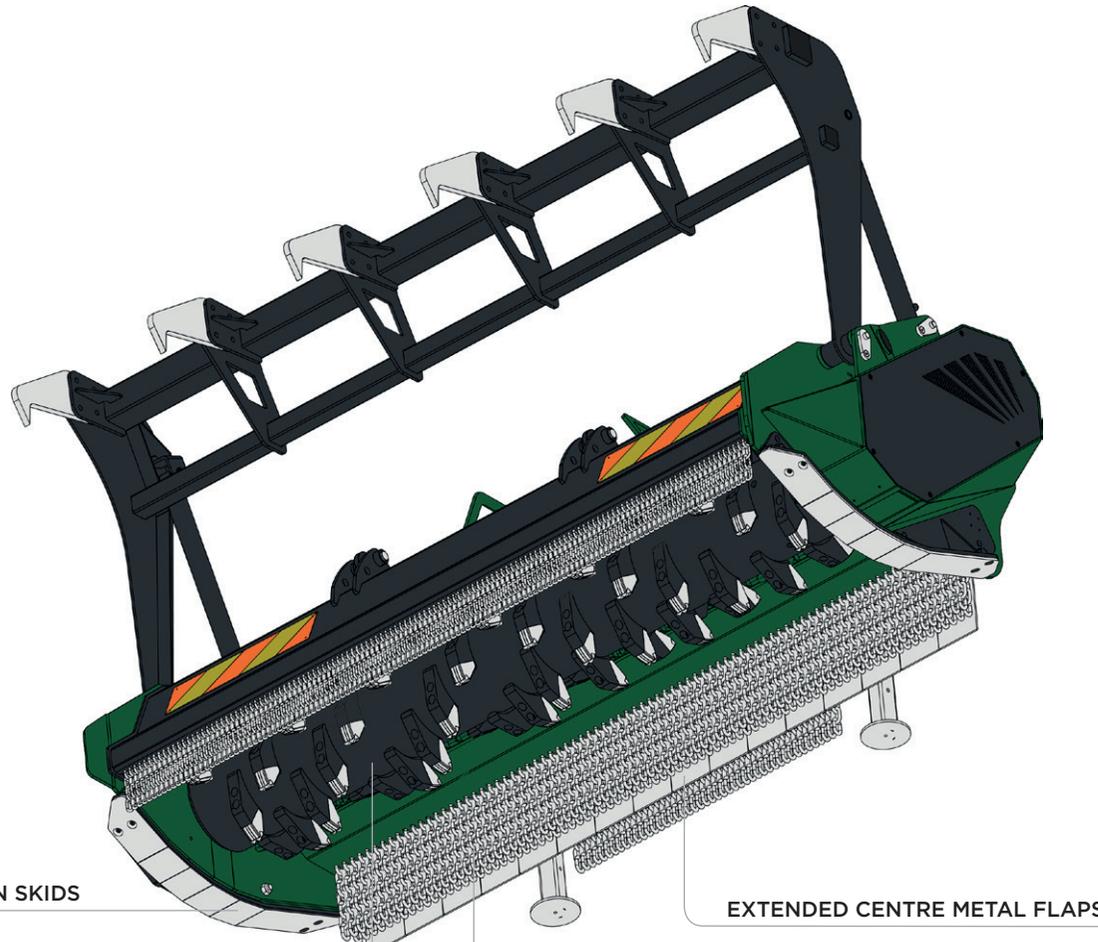

REPLACEABLE BOLT-ON SKIDS

EXTENDED CENTRE METAL FLAPS

HEAVY DUTY ROTOR WITH HARDENED TEETH

DOUBLE CURTAIN FRONT AND REAR CHAINS

The Destroyer Flail HD is designed to cut and pulverize heavy scrub and forestry regrowth up to 250mm. It is the perfect choice for high output operators in maintaining areas such as woodland dense scrub and plantations.

This highly robust machine features heavy duty mulching teeth fitted on an electronically balanced rotor mounted on enclosed, self-aligning bearings. A heavy-duty driveline with 10 belts, gives reliable power transmission in the most challenging conditions. Other key features are an adjustable hydraulic opening hood and push frame with grab teeth, which work together to ensure that material is channeled efficiently into the mulcher.

The Destroyer Flail HD is available in a working width of 2.5 metres and is ideal for forward and reverse drive.

| SPECIFICATION | | DESTROYER FLAIL HD250F | |
|------------------------|---|------------------------|-----------------------------|
| Machine weight | 2650kg (5842lbs) | Input shaft | 1 3/4" Z6 |
| Hitch | Category 2 with clevis top link | Gearbox lubricant | EP80-90W or GL-4 / GL-5 oil |
| Hitch position | Rear mount only | Gearbox oil capacity | 4 litres (7 pints) |
| Cutting width | 2.50m (8' 2") | Cowl construction | All welded construction |
| Overall width | 2.92m (9' 7") | Skid construction | Replaceable bolt-on skid |
| Overall length | 1.52m (5') | Teeth | Heavy-duty tooth |
| Cutting height | 40mm - 80mm (1.6" - 3.2") | Tooth quantity | 72 |
| Cutting capacity | 250mm (9.8") | Tooth tip speed | 53 m/s (10433 fpm) |
| Recommended tractor HP | 80hp (60kW) | Rotor diameter | 298mm (12") |
| Power take-off speed | 1000rpm | Number of belts | 10 (5+5) |
| Gearbox | Cast iron housing with integrated enclosed connecting shaft | | |

SPEARHEAD

📍 Station Road, Salford Priors, Evesham, Worcestershire, WR11 8SW, England 📞 +44 (0)1789 491860

✉️ enquiries@spearheadmachinery.com 📧 spearheadmachinery.com 🐦 📘 SpearheadWorld

