

# SPEARHEAD

## STUBBLE MASTER 910





STUBBLE MASTER 910

With high output in mind the Stubble Master 910 is designed to deliver superb performance in some of the largest arable applications in world farming.










Packed with a massive 9.1 metres of cutting width the machine can also be fitted with the standard Multicut blade to appeal to further applications within aviation and the military.

The Stubble Master 910 builds on the features packed into the smaller 500 and 730 models with a monocoque deck and HD6 cutting system as standard.





Cutting performance is boosted by complimentary deck baffling to ensure a fine mulch and even spread in grassland and cereal crops.

With an extended cutting width the machine still folds down to a compact transport width with an innovative folding mechanism ensuring that the wing tips fold over completely to reduce the transport height within road legal limits.

STUBBLE MASTER 910

								
TRACTOR HP	PTO SPEED	TRANSPORT WIDTH	CUTTING WIDTH	GEARBOX RATING	NUMBER OF WHEELS	NUMBER OF ROTORS	NUMBER OF BLADES	CUTTING HEIGHT
190hp	1000rpm	3.00m / 9' 10"	9.09m / 29' 9"	250hp & 116hp	8	5	30	25 - 400mm 1" - 16"



UNIT OPTIONS

- AIR BRAKES
- ARAMIDE BELT TYRES
- MULTICUT TYRES
- FRONT FLAP KIT

STUBBLE MASTER 910






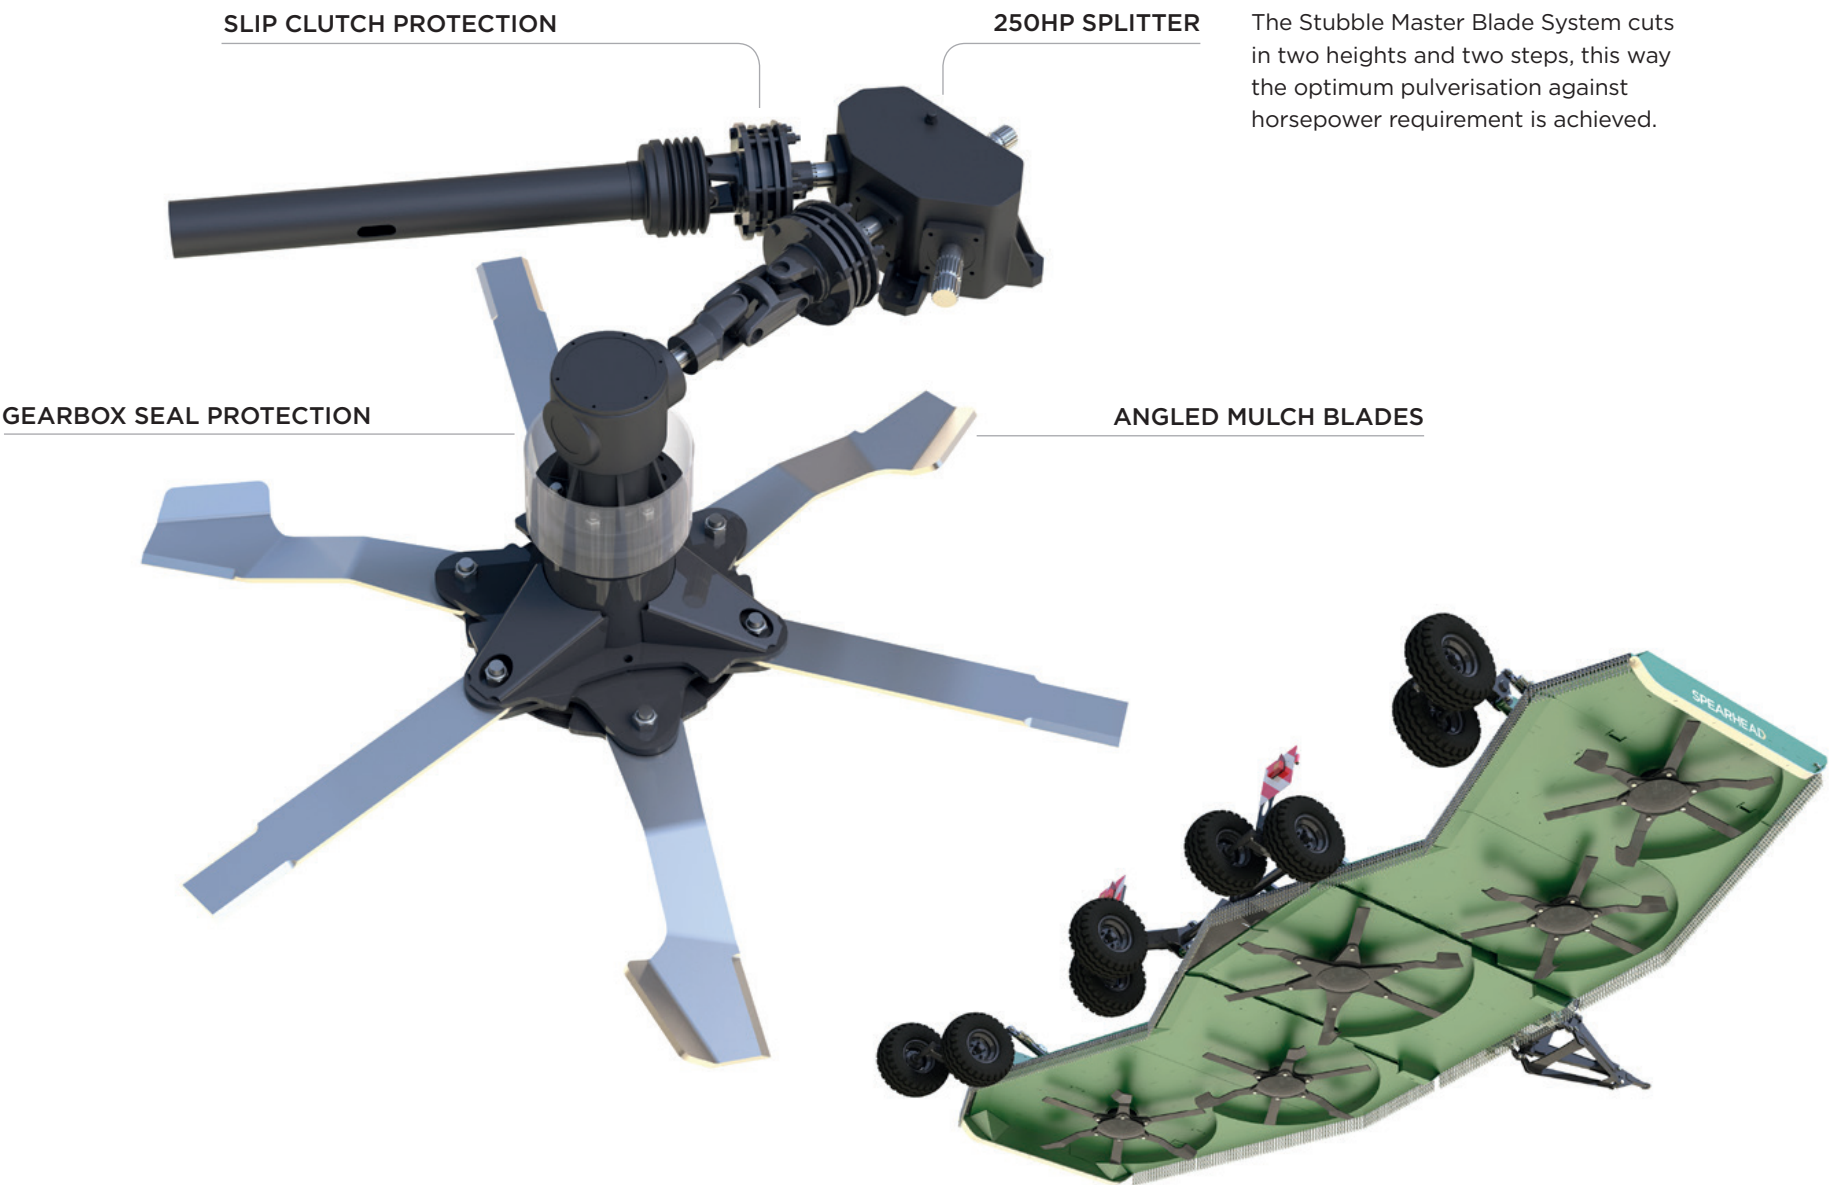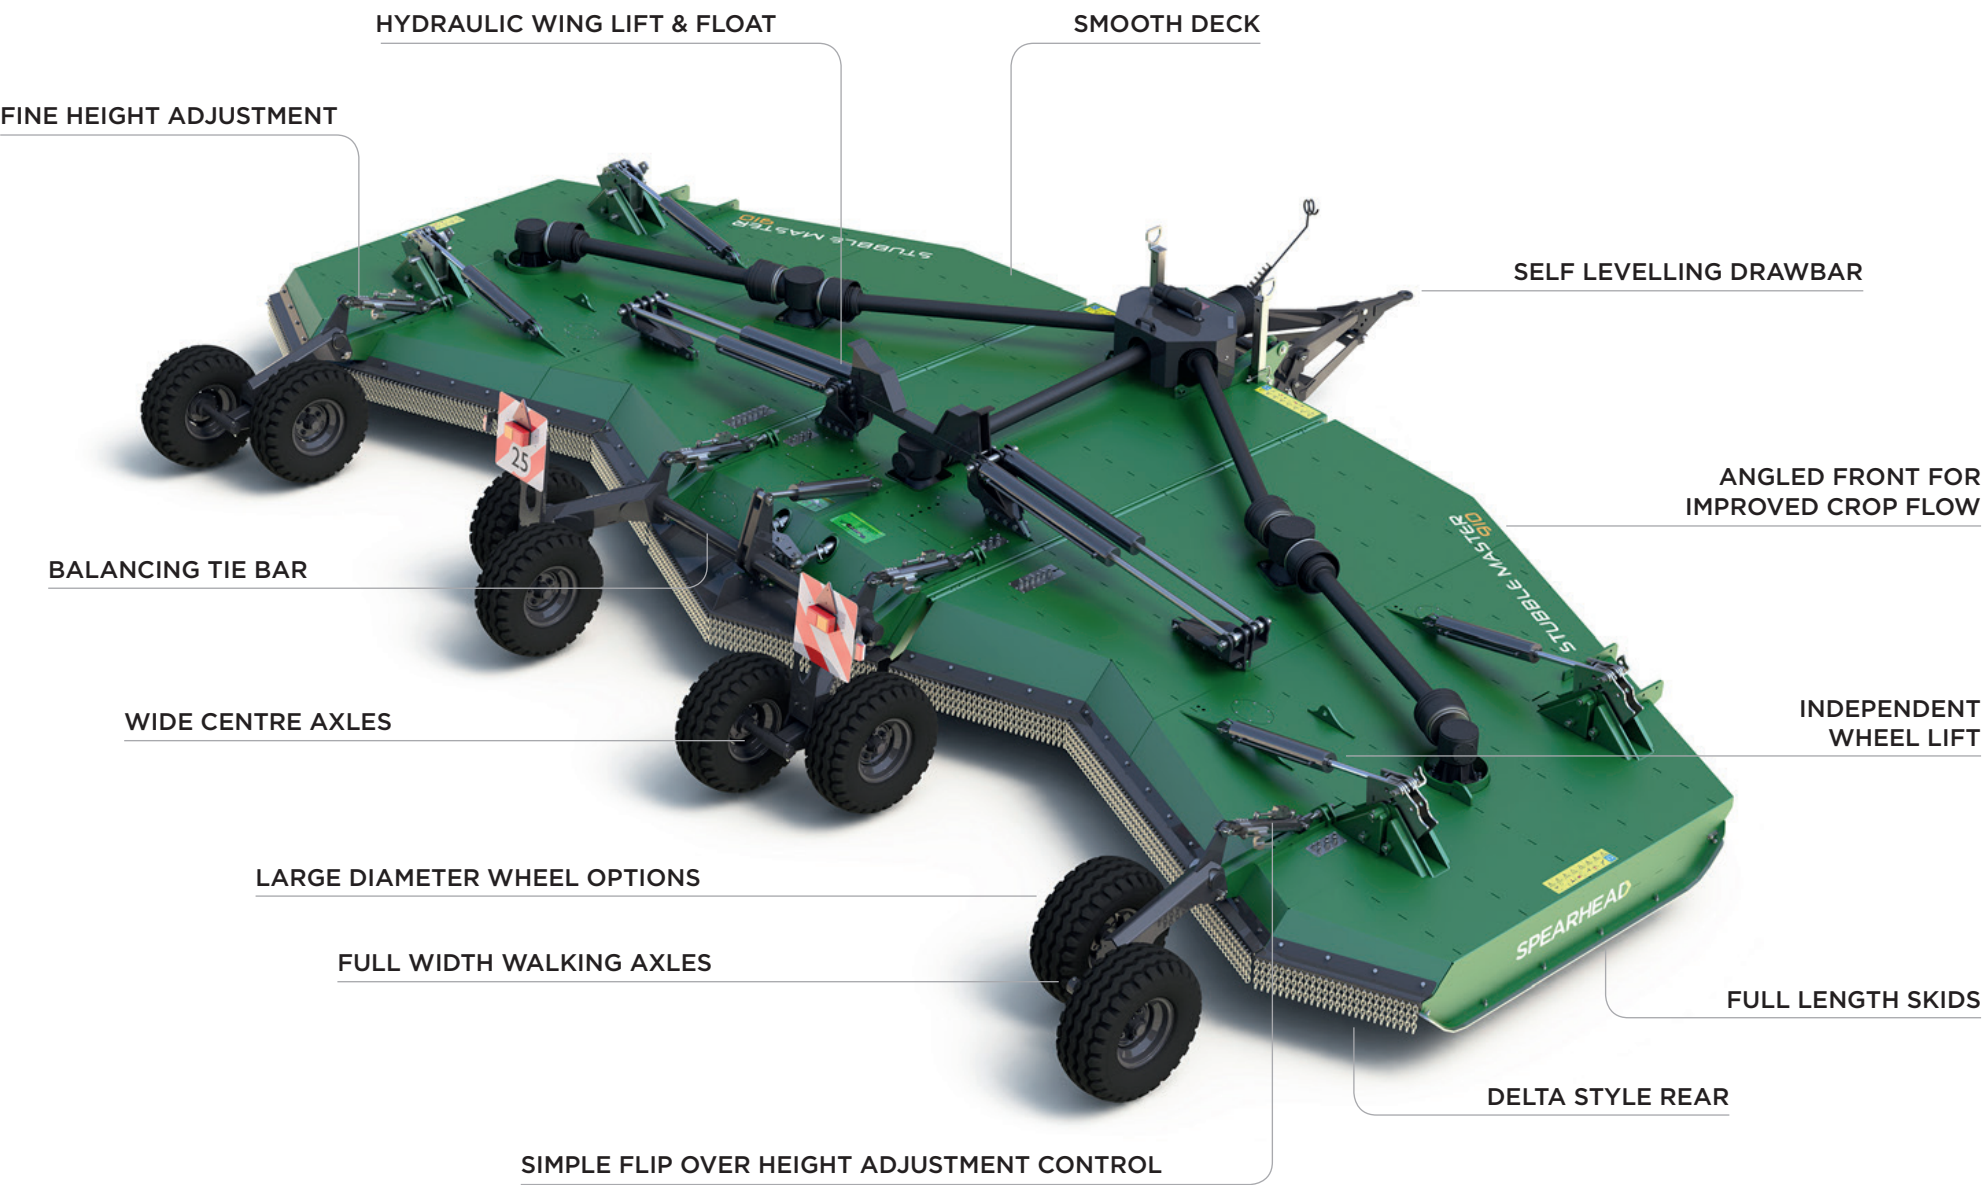

MACHINE	STUBBLE MASTER 910		
Machine weight*	6750kg / 14882lbs	Gearbox oil capacity [outer rotor gearboxes (x2)]	2.1 litres / 3.7 pints
Hitch	Multi-positional drawbar	Deck construction	All welded construction
Cutting width	9.09m / 29' 9"	Deck material thickness	3mm (1/8")
Working machine width	9.32m / 30' 7"	Side skirt material thickness	6mm (1/4")
Transport machine width	3.00m / 9' 10"	Skid construction	Replaceable bolt on skid shoes
Maximum working length	6.42m / 21' 1"	Anti-scalp dish	5mm (3/16") round pan with blade holder bar
Transport length	6.37m / 20' 11"		
Deck height**	0.26m / 10"	Blades standard (x15)	12mm (1/2") 30 Carbon Boron hardened and tempered. Free swinging high lift - low friction. Handed.
Transport height	3.17m / 12' 4"		
Cutting height	25mm - 400mm (1" - 16")	Blades Starcut (x15)	12mm (1/2") 30 Carbon Boron hardened and tempered. Free swinging high lift - low friction. Non-handed.
Cutting capacity	100mm / 4"		
Recommended tractor HP	190hp / 142kW	Blade bolts	M24 C/W shank grade 8.8
Wing working angles	15° up / 5° down	Blade tip speed	88mps / 17322fpm
Power take-off speed	1000rpm	Driveline	ASAE Category 10
Gearbox [splitter]	Cast Iron housing	Driveline protection	2/4-way slip clutches on rotor gearboxes. Overrun on input shaft
Gearbox [rotor gearboxes (x5)]	Cast Iron housing	Tailwheel mount assemblies	Tubular welded walking axles
Input shaft	1-3/4" Z20 SFT tractor end	Tailwheels (x8)	7.00-12 pneumatic tyre with steel hub
Gearbox lubricant	EP80-90W or GL-4 / GL-5 oil	Front guard	Single chain guards on each deck
Gearbox oil capacity [splitter gearbox]	2.7 litres / 4.7 pints	Rear guard	Single chain guards on each deck
Gearbox oil capacity [centre and inner rotor gearboxes (x3)]	3.5 litres / 6.2 pints		

\*With front and rear single chain guards    \*\* Underside of deck to skid

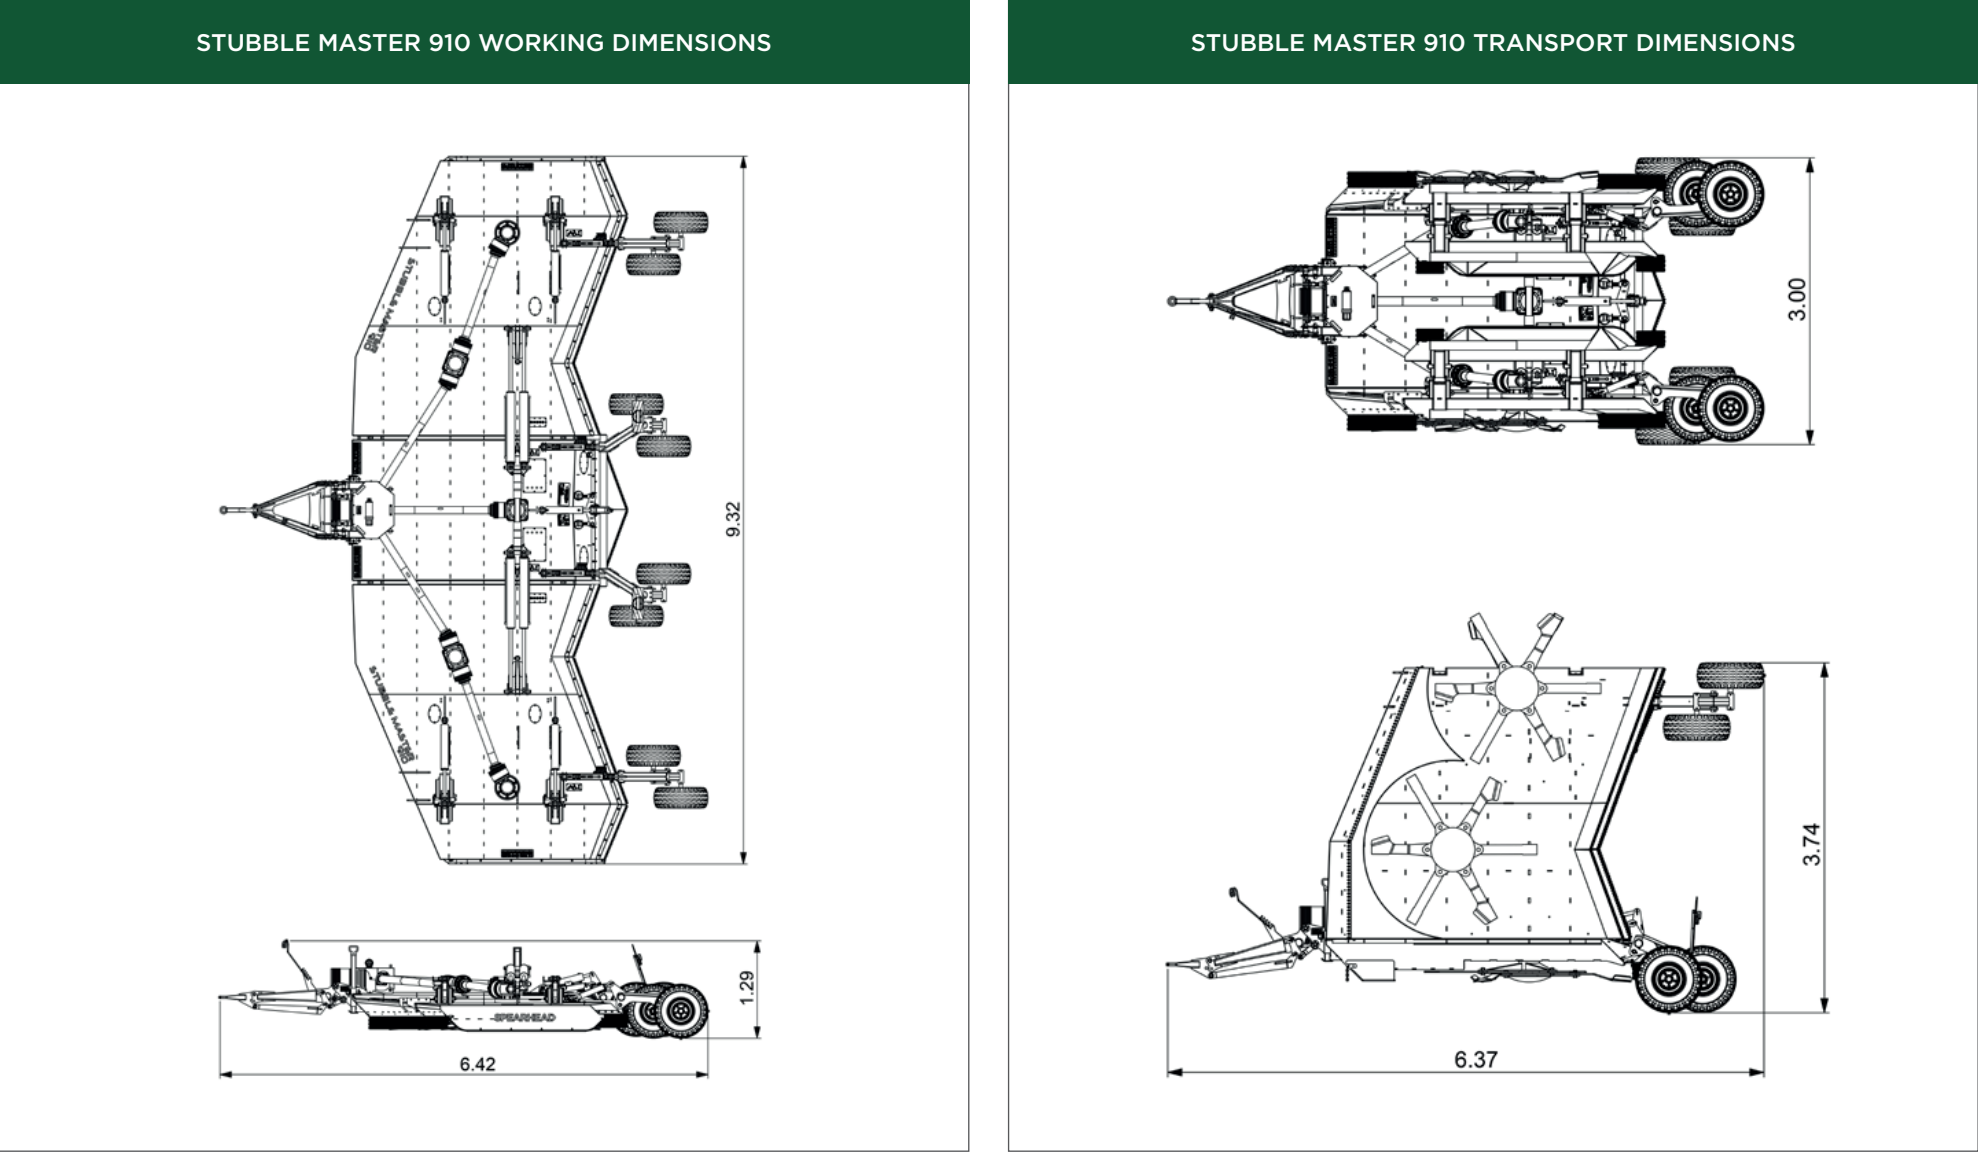

# SPEARHEAD

📍 Station Road, Salford Priors, Evesham, Worcestershire, WR11 8SW, England

☎ +44 (0)1789 491860

✉ [enquiries@spearheadmachinery.com](mailto:enquiries@spearheadmachinery.com)

💻 [spearheadmachinery.com](http://spearheadmachinery.com)

🐦 [Spearhead World](#)



designed and built in  
**GREAT BRITAIN** 

Spearhead  
is a member of the

