



TWIGA REACH MOWERS





TWIGA REACH MOWERS

When you require a machine for the maintenance of hedgerows or the management of vegetation you should look no further than Spearhead.

With an extensive range of products, and a heritage and reputation built on providing professional solutions; Spearhead's TWIGA series really is the first choice for all of your reach mowing needs.

Spearhead boasts one of the most extensive fleets of reach mowers available in the world today.

Reaches range from 3.2 metres right through to 8.9 metres and are complimented by a variety of specialist attachments that mean your every need is catered for. With six different series within the portfolio, there is a specialist tool to suit your specific cutting requirement.

www.spearheadmachinery.com

[Twitter](#) [Facebook](#) [SpearheadWorld](#)



TWIGA REACH MOWERS

➤ Twiga Compact	4
➤ Twiga Classic	5
➤ Twiga Mid	6
➤ Twiga Pro	7
➤ Twiga Orbital	8
➤ Twiga Flex	9
➤ Options	10
➤ Control Options	11
➤ Flailheads	12
➤ Attachments	13
➤ Autopilot	15
➤ Specification	16

TWIGA COMPACT



TWIGA CLASSIC



Overview

Spearhead's Twiga Compact series reach mower incorporates the same robust technology as larger models in the Spearhead range to bring enhanced levels of durability and reliability in a compact package.

An industrial grade reach mower, the Twiga Compact series can be fitted with a multitude of attachments, providing flexibility in operations and increasing utilisation in key applications such as local amenity and grounds maintenance contracts.

Available with sideways reach options of 3.2 and 4.2 metres and a choice of front or rear mounting, the Twiga Compact series is specified with a potent 35hp hydraulic system that provides exceptional output.

Features

- 3.2 and 4.2 metre reach options
- 25hp minimum tractor requirement
- 3-point linkage or DIN plate mounting
- Parallel arm geometry
- Fully independent hydraulic system
- 60 litre oil capacity
- Hydraulic safety breakout
- Low power requirement
- Choice of control systems
- Choice of cutting heads and attachments

Specification

Specification	TWIGA 320	TWIGA 420
Maximum reach	3.2m (10' 6")	4.2m (13' 9")
Machine weight*	450kg	480kg
Transport width	1.8m (5' 11")	1.8m (5' 11")
Oil tank capacity	60ltr	60ltr
Gear totally independent hydraulics	Standard	Standard
3-point linkage mounting	Standard	Standard
Right hand or left hand build	Optional	Optional
Tractor power required**	25hp	40hp
Tractor weight required**	1300kg	2000kg

* Dependent on machine specification (including oil, excluding flailhead or attachment)
 ** Dependent on conditions

Specification

Specification	TWIGA 470	TWIGA 500	TWIGA 545	TWIGA 595	TWIGA 640T
Maximum reach	4.7m (15' 5")	5.0m (16' 5")	5.4m (17' 9")	5.9m (19' 4")	6.4m (21' 0")
Machine weight*	970kg	1170kg	1360kg	1380kg	1450kg
Transport width	2.4m (7' 10")	2.4m (7' 10")	2.6m (8' 6")	2.6m (8' 6")	2.6m (8' 6")
Oil tank capacity	140ltr	190ltr	220ltr	220ltr	220ltr
Gear totally indep. hydraulics	Standard	Standard	Standard	Standard	Standard
3-point linkage mounting	Standard	Standard	Standard	Standard	Standard
Right hand or left hand build	Optional	Optional	Optional	Optional	Optional
Tractor power required**	60hp	70hp	90hp	95hp	100hp
Tractor weight required**	2250kg	2500kg	3500kg	3750kg	4000kg

* Dependent on machine specification (including oil, excluding flailhead or attachment) ** Dependent on conditions
 † Apart from TWIGA 470 45hp

Features

- 4.7, 5.0, 5.4, 5.9 and 6.4 metre reach options
- 60hp minimum tractor requirement
- 3-point linkage mounting
- Parallel arm geometry
- Fully independent 65hp hydraulic system
- 140 – 220 litre oil capacity
- Hydraulic safety breakout
- Low power requirement
- Choice of control systems
- Choice of cutting heads and attachments

Overview

Spearhead's Twiga Classic series reach mower incorporates a strong combination of power and flair with a stripped back look that contributes to the best value for money machine on the market.

Based on the highly acclaimed Excel 565 – a legend in the Spearhead stable, the Twiga Classic series satisfies the requirements of a host of different markets and applications whilst building on the same robust technology as larger models in the Spearhead range.

Powered by a 65hp† hydraulic system, the Twiga classic series is available with sideways reach options of 4.7, 5.0, 5.4, 5.9 and 6.4 metres with rear mounting as standard.

TWIGA MID



TWIGA PRO



Overview

Combining many years of hedgecutter design with the latest technology, Spearhead's best-selling, Twiga Mid series reach mower provides exceptional performance, reliability, durability and ease of operation.

Power is delivered by a potent 75hp fully independent hydraulic system favoured by the most demanding of cutting professionals.

The machine is available with sideways reach options of 5.5, 6.0, 6.5 and 7.0 metres with rear mounting as standard. The 5.5 and 6.0 metre options can be delivered with a forward reach arm set for improved visibility, whilst the 6.5 and 7.0 metre versions are both telescopic as standard.

Features

- 5.5, 6.0, 6.5 and 7.0 metre reach options
- 90hp minimum tractor requirement
- 3-point linkage or axle bracket mounting
- Parallel arm geometry
- 220 litre oil capacity
- Hydraulic safety breakout
- Fully independent 75hp hydraulic system
- LED rear lighting kit
- Choice of control systems
- Choice of cutting heads and attachments

Specification

Specification	TWIGA 555	TWIGA 600	TWIGA 655T	TWIGA 700T
Maximum reach	5.5m (18' 1")	6.0m (19' 8")	6.5m (21' 4")	7.0m (23' 0")
Machine weight*	1360kg	1380kg	1475kg	1505kg
Transport width	2.6m (8' 6")	2.6m (8' 6")	2.6m (8' 6")	2.6m (8' 6")
Oil tank capacity	220ltr	220ltr	220ltr	220ltr
Gear totally independent hydraulics	Standard	Standard	Standard	Standard
3-point linkage mounting	Standard	Standard	Standard	Standard
Axle mounting	Optional	Optional	Optional	Optional
Right hand or left hand build	Optional	Optional	Optional	Optional
LED rear lighting kit	Standard	Standard	Standard	Standard
Tractor power required**	90hp	95hp	100hp	110hp
Tractor weight required**	3500kg	3750kg	4000kg	4500kg

* Dependent on machine specification (including oil, excluding flailhead or attachment)
 ** Dependent on conditions

Specification

Specification	TWIGA PRO 560	TWIGA PRO 650T	TWIGA PRO 700T	TWIGA PRO 800T	TWIGA PRO 600VFR	TWIGA PRO 650VFR
Maximum reach	5.6m (18' 5")	6.5m (21' 4")	7.0m (23' 0")	8.0m (26' 3")	6.0m (19' 8")	6.5m (21' 4")
Machine weight*	1500kg	1650kg	1720kg	1850kg	1700kg	1750kg
Transport width	2.5m (8' 2")	2.5m (8' 2")	2.5m (8' 2")	2.5m (8' 2")	2.5m (8' 2")	2.5m (8' 2")
Oil tank capacity	220ltr	220ltr	220ltr	220ltr	220ltr	220ltr
Gear totally indep. hydraulics	Standard	Standard	Standard	Standard	Standard	Standard
3-point linkage mounting	Standard	Standard	Standard	Standard	Standard	Standard
Axle mounting	Optional	Optional	Optional	Optional	Optional	Optional
Right hand or left hand build	Optional	Optional	Optional	Optional	Optional	Optional
LED rear lighting kit	Standard	Standard	Standard	Standard	Standard	Standard
Tractor power required**	100hp	120hp	140hp	160hp	120hp	140hp
Tractor weight required**	4500kg	5000kg	6000kg	6500kg	5000kg	6000kg

* Dependent on machine specification (including oil, excluding flailhead or attachment)
 ** Dependent on conditions

Features

- 5.6, 6.5, 7.0 and 8.0 metre reach options
- 100hp minimum tractor requirement
- 3-point linkage or axle bracket mounting
- Parallel arm geometry
- Fully independent 85hp hydraulic system
- 220 litre oil capacity
- Hydraulic safety breakout
- LED rear lighting kit
- Choice of control systems
- Choice of cutting heads and attachments

Overview

The Twiga Pro series is the professional task master designed to cope with the toughest of jobs. Featuring a host of innovative design features the Twiga Pro is an extremely robust, high specification reach mower built to suit the specialist contractor and large scale farmer.

Delivered with an appearance that sets it apart, the Twiga Pro also represents the latest standards in advancing performance, reliability, durability and ease of operation in the modern reach mower sector.

Power is delivered standard by a potent high output 85hp hydraulic system specified to appease the most demanding of green maintenance professionals.

TWIGA ORBITAL



TWIGA FLEX



Overview

Seeing is believing when you discover the Twiga Orbital series at work. The innovative design helps cut costs and time spectacularly with the flexibility to cut on both sides of the machine.

Innovative 180 degree slew enables the operator to mow either side of the tractor cab, with switching possible even whilst on the move. There are no pins to remove or no unhitching, thus reducing the time lost when travelling between passes.

Power is delivered standard by an 80hp fully independent piston hydraulic system which allows exceptional performance in intensive grass mowing applications.

Features

- 6.0, 6.8, 7.2 and 8.3 metre reach options
- 120hp minimum tractor requirement
- 3-point linkage or axle bracket mounting
- Parallel arm geometry
- Fully independent 80hp hydraulic system
- 230 litre oil capacity
- Hydraulic safety breakout
- LED rear lighting kit
- Ability to cut either side of the machine
- Choice of cutting heads and attachments

Specification

	TWIGA ORBITAL 606	TWIGA ORBITAL 686	TWIGA ORBITAL 726T	TWIGA ORBITAL 836T
Maximum reach	6.0m (19' 8")	6.8m (22' 4")	7.2m (23' 8")	8.3m (27' 3")
Machine weight*	2155kg	2315kg	2375kg	2400kg
Transport width	2.4m (7' 10")	2.4m (7' 10")	2.4m (7' 10")	2.4m (7' 10")
Oil tank capacity	230ltr	230ltr	230ltr	230ltr
Piston totally independent hydraulics	Standard	Standard	Standard	Standard
3-point linkage mounting	Standard	Standard	Standard	Standard
Axle mounting	Optional	Optional	Optional	Optional
LED rear lighting kit	Standard	Standard	Standard	Standard
Tractor power required**	120hp	130hp	140hp	150hp
Tractor weight required**	4500kg	4750kg	5000kg	6000kg

* Dependent on machine specification (including oil, excluding flailhead or attachment)

** Dependent on conditions

Specification

	TWIGA FLEX 670	TWIGA FLEX 740	TWIGA FLEX 800T	TWIGA FLEX 890T
Maximum reach	6.7m (22' 0")	7.4m (24' 3")	8.0m (26' 3")	8.9m (29' 2")
Machine weight*	2100kg	2200kg	2550kg	2660kg
Transport width	2.2m (7' 3")	2.2m (7' 3")	2.2m (7' 3")	2.2m (7' 3")
Oil tank capacity	220ltr	220ltr	220ltr	220ltr
Piston totally independent hydraulics	Standard	Standard	Standard	Standard
3-point linkage mounting	Standard	Standard	Standard	Standard
Axle mounting	Optional	Optional	Optional	Optional
Right hand or left hand build	Optional	Optional	Optional	Optional
LED rear lighting kit	Standard	Standard	Standard	Standard
Tractor power required**	140hp	150hp	160hp	170hp
Tractor weight required**	6000kg	6250kg	6500kg	6750kg

* Dependent on machine specification (including oil, excluding flailhead or attachment)

** Dependent on conditions

Features

- 6.7, 7.4, 8.0 and 8.9 metre reach options
- 120hp minimum tractor requirement
- 3-point linkage or axle bracket mounting
- Parallel arm geometry
- Fully independent 80hp load sensing hydraulic system
- 220 litre oil capacity
- Cuts in both directions - forward or reverse drive
- Rotorflex head rotation system
- Works throughout the full 148 degrees of slewing arc
- Choice of cutting heads and attachments

Overview

The Twiga Flex series is the most prestigious and feature packed reach mower in the Spearhead range. With a multitude of high specification components the machine provides the most luxurious, high output reach mower combination on the market.

Featuring an arm-set that can be shifted through 148 degrees, the Twiga Flex series offers 58 degrees more forward travel than a traditional machine and can cut in every positional degree to allow the operator ultimate visibility.

Coupled with the visionary 'Rotorflex' head rotation system the 70 centimetre offset slew pivot allows the arm to be bought alongside the tractor as far forward as, and in line with the front linkage if desired by the simple adjustment of the machines slewing column.


TWIGA OPTIONS



HEAD FLOAT KIT



ARM FLOAT KIT

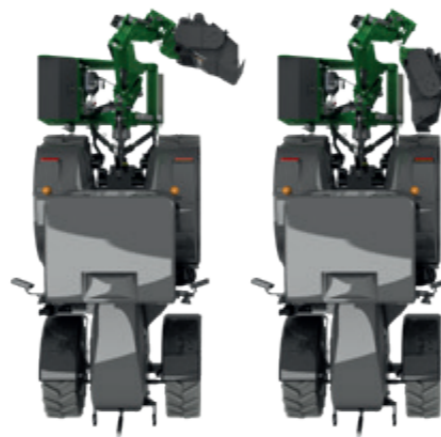

NARROW LANE BRACKET



DEBRIS BLOWER KIT



AXLE MOUNTING SYSTEM



OIL COOLER KIT

TWIGA CONTROLS

CONTROLS

Your Twiga Reach mower can be specified with a choice of control systems from the basic Progressive Cable system to the state-of-the-art Propilot. All systems are ergonomically designed to provide the operator with long term comfort and ease of use.



PROGRESSIVE CABLE

Progressive cable controls provide both individual and simultaneous operation of the arm and attachment in a simple multi-level arrangement.



MINIPILOT

The Minipilot control system offers electric proportional control of the lift, reach and angling functions utilising one mini joystick. This option gives the operator a high specification, responsive controller for compact in cab mounting.



PRECISION PROPORTIONAL

Precision Proportional is the classic industry renowned low pressure hydraulic controller. Ergonomically arranged for logical directional movement, the system offers simultaneous operation of all services in one convenient package.



MULTIPILOT

Multipilot is the next generation low pressure hydraulic controller. Packed with functionality, the controller is designed with all key functions on hand at the joystick. A fully adjustable armrest is supplied with the controller aiding mounting and reducing driver fatigue.




PROPILOT

Propilot provides an industry leading hydraulic proportional control system, but is also available in a full electric version to suit operator preference. Benefitting from additional proportional functionality on the joystick, Propilot is feature packed for matching with the Mid, Pro and Flex ranges.

TWIGA FLAILHEADS

FLAILHEADS

The flailhead is the business end of your Twiga Reach Mower. As your business tool, Spearhead understands that different operators have different cutting requirements and for this reason a wide range of flailheads and cutting attachments are offered to be tailored to your individual and specific needs.

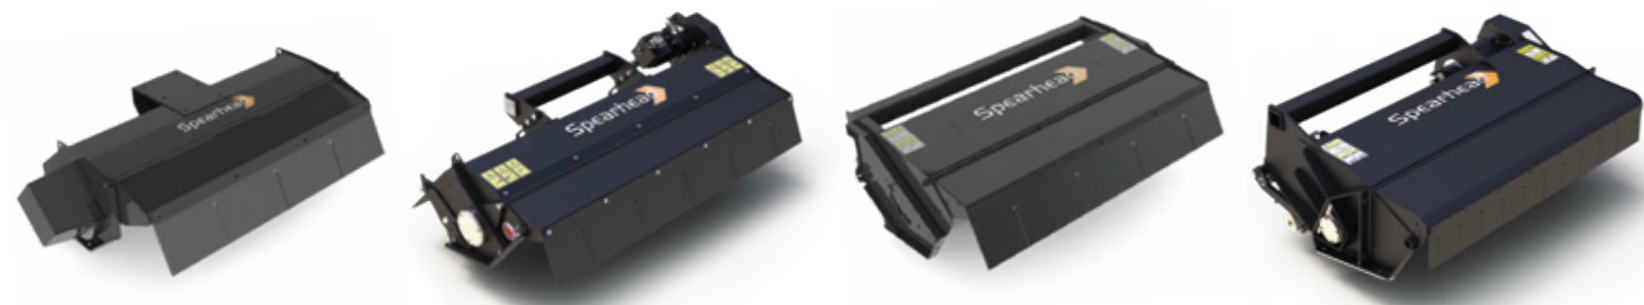

MP COMPACT FLAILHEAD

- 0.9 metre cutting width
- Direct drive
- Adjustable front hood
- Standard roller only
- For the Twiga Compact only

MP1 FLAILHEAD

- 1.2 or 1.5 metre cutting widths
- Direct or belt drive
- Twin lug rotor
- Adjustable front hood
- Hydraulic roller option

MP2 FLAILHEAD

- 1.2 metre cutting width
- Direct drive
- Wrap around rotor
- Adjustable front hood
- Standard roller only

PB FLAIL HEAD

- 1.2 or 1.6 metre cutting width
- Belt drive
- Wrap around rotor
- Adjustable front hood
- Hydraulic roller option



HYDRAULIC ROLLER

The innovative Spearhead Hydraulic Roller allows the rear roller to be positioned remotely utilising the Twiga Controls. This option is ideal for quick transitions between hedge and verge cutting operations without the need to remove bolts or pins.

SKID KIT

A bolt on skid kit is offered on the MP2 and PB heads extending the depth of the cowl enabling the head to better contour the ground in continuous verge mowing situations. This option is proven to reduce flail wear and ground scalping.

FLAILS



Back to Back Flail

For high performance verge mowing.



C Flail

Suitable for hedge and grass cutting.



D Flail

Suitable for hedge and grass cutting.



T Flail

Heavy duty hedge cutting flail.

TWIGA ATTACHMENTS

ATTACHMENTS

Your Twiga Reach mower can be utilised for many complimentary operations. Expand your business offering by selecting additional attachments to make your machine more versatile throughout the season.



HC ROTARY HEADS

- 1.3 or 1.5 metre cutting width
- 40mm cutting capacity
- Finely mulches material
- Low noise levels
- Angled cowl design

HD ROTARY HEADS

- 1.2 or 1.5 metre cutting width
- 120mm cutting capacity
- Chain or blade options
- Hydraulic front hood
- Ideal for grass or hedge

QUADSAW

- 1.4, 1.6, 2.0 or 2.4 metre cutting widths
- 5 – 100mm cutting capacity
- Special flexible Widia blades
- Low noise levels
- High speed belt drive

DITCH CLEANER

- 600mm cutting disc
- Four cutting blades
- Four throwing blades
- Hydraulic head rotation
- Adjustable exit spout

TWIGA ATTACHMENTS



HL CUTTERBAR

- 1.5, 1.8 or 2.1 metre cutting widths
- 30mm cutting capacity
- 200-400 cuts per minute
- Hard-wearing teeth
- Rounded fingers prevent trapping

HX CUTTERBAR


- 1.7, 2.3 or 2.7 metre cutting widths
- 110mm cutting capacity
- 60 cuts per minute
- Hardox steel blades
- Soft-turn technology

KR ROTARY RAKE

- 2.5 metre working width
- Twin castor wheels
- 9 sprung tines
- Sprung breakaway protection
- Ideal for raking on riverbanks

BR WEED BRUSH

- 0.9 metre working width
- Hard wearing steel brushes
- Adjustable deflector curtain
- Adjustable depth control
- Ideal for gutters and pavements

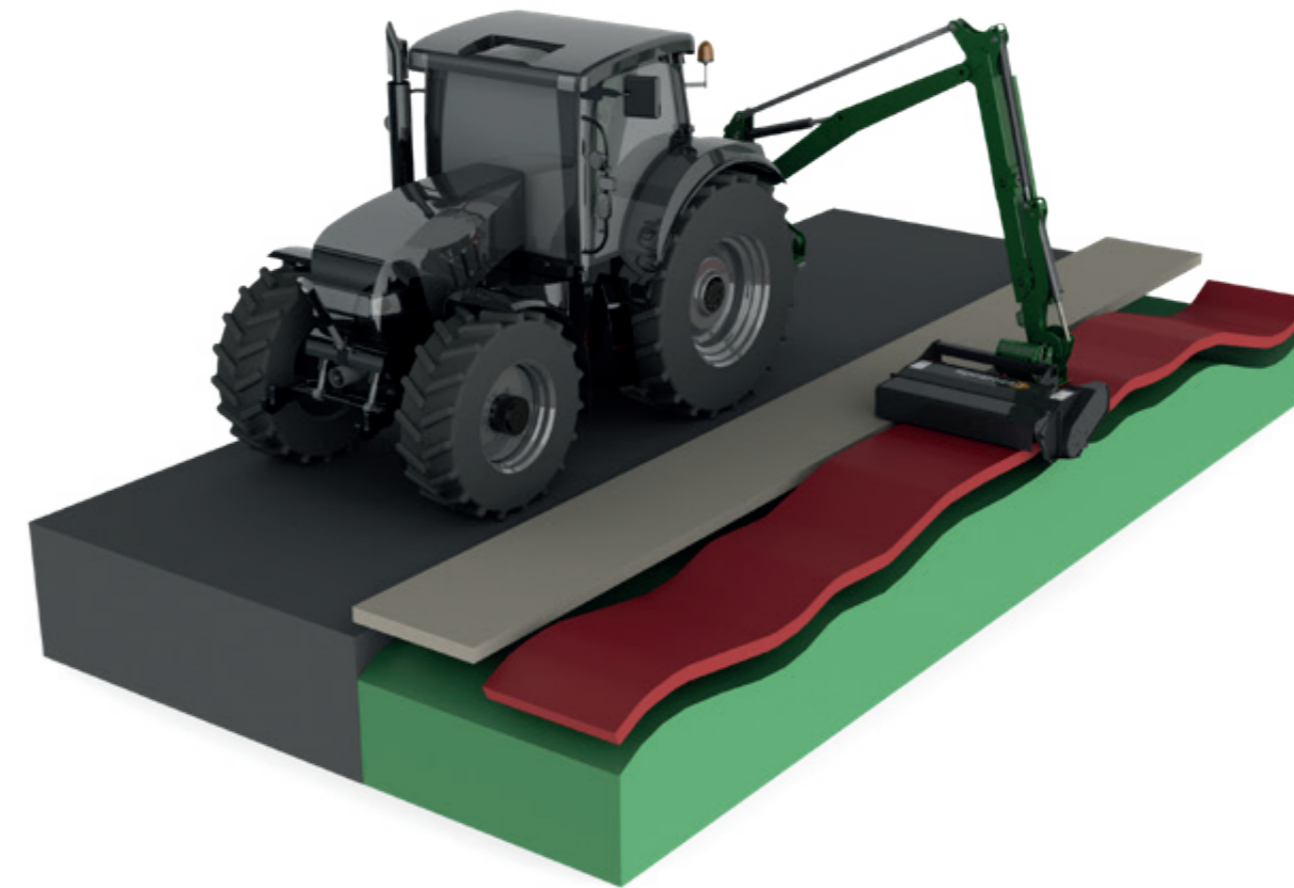

TWIGA AUTOPILOT



AUTOPILOT

Autopilot is an advanced automatic hands free control system which follows the ground contours when verge mowing, increasing working speed and efficiency.

The Autopilot system automatically controls the floatation of the flailhead to follow the ground contours without any operator input.

Features

- Automatically follows ground contours
- Increases working speed
- Reduces operator fatigue

TWIGA SPECIFICATION

TWIGA SPECIFICATION

RANGE	TWIGA COMPACT	TWIGA COMPACT	TWIGA CLASSIC	TWIGA CLASSIC	TWIGA CLASSIC	TWIGA CLASSIC	TWIGA CLASSIC	TWIGA MID	TWIGA MID	TWIGA MID	TWIGA MID	TWIGA PRO	TWIGA PRO	TWIGA PRO	TWIGA PRO	TWIGA PRO	TWIGA PRO	TWIGA ORBITAL	TWIGA ORBITAL	TWIGA ORBITAL	TWIGA ORBITAL	TWIGA FLEX	TWIGA FLEX	TWIGA FLEX	TWIGA FLEX
SPECIFICATION	TWIGA 320	TWIGA 420	TWIGA 470	TWIGA 500	TWIGA 545	TWIGA 595	TWIGA 640T	TWIGA 555	TWIGA 600	TWIGA 655T	TWIGA 700T	TWIGA PRO 560	TWIGA PRO 650T	TWIGA PRO 700T	TWIGA PRO 800T	TWIGA PRO 600VFR	TWIGA PRO 650VFR	TWIGA ORBITAL 606	TWIGA ORBITAL 686	TWIGA ORBITAL 726T	TWIGA ORBITAL 836T	TWIGA FLEX 670	TWIGA FLEX 740	TWIGA FLEX 800T	TWIGA FLEX 890T
Progressive cable controls	■	■	■	■	■	■	■	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Minipilot controls	□	□	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Precision proportional controls	-	-	-	□	□	□	□	■	■	■	■	■	■	■	■	■	■	■	■	■	■	-	-	-	-
Multipilot controls	-	-	-	-	-	-	-	□	□	□	□	□	□	□	□	□	□	□	-	-	-	-	-	-	-
Propilot (hydraulic) controls	-	-	-	-	-	-	-	□	□	□	□	□	□	□	□	□	□	-	-	-	-	-	-	-	-
Propilot (electric) controls	-	-	-	-	-	-	-	□	□	□	□	□	□	□	□	□	□	-	-	-	-	■	■	■	■
Maximum reach	3.2m (10' 6")	4.2m (13' 9")	4.7m (15' 5")	5.0m (16' 5")	5.4m (17' 9")	5.9m (19' 4")	6.4m (21' 0")	5.5m (18' 1")	6.0m (19' 8")	6.5m (21' 4")	7.0m (23' 0")	5.6m (18' 5")	6.5m (21' 4")	7.0m (23' 0")	8.0m (26' 3")	6.0m (19' 8")	6.5m (21' 4")	6.0m (19' 8")	6.8m (22' 4")	7.2m (23' 8")	8.3m (27' 3")	6.7m (22' 0")	7.4m (24' 3")	8.0m (26' 3")	8.9m (29' 2")
Machine weight*	450kg	480kg	970kg	1170kg	1360kg	1380kg	1450kg	1360kg	1380kg	1475kg	1505kg	1500kg	1650kg	1720kg	1850kg	1700kg	1750kg	2155kg	2315kg	2375kg	2400kg	2100kg	2200kg	2550kg	2660kg
Transport width	1.8m (5' 11")	1.8m (5' 11")	2.4m (7' 10")	2.4m (7' 10")	2.6m (8' 6")	2.6m (8' 6")	2.6m (8' 6")	2.6m (8' 6")	2.6m (8' 6")	2.6m (8' 6")	2.6m (8' 6")	2.5m (8' 2")	2.5m (8' 2")	2.5m (8' 2")	2.5m (8' 2")	2.5m (8' 2")	2.5m (8' 2")	2.4m (7' 10")	2.4m (7' 10")	2.4m (7' 10")	2.4m (7' 10")	2.2m (7' 3")	2.2m (7' 3")	2.2m (7' 3")	2.2m (7' 3")
Oil tank capacity	60ltr	60ltr	140ltr	190ltr	220ltr	220ltr	220ltr	220ltr	220ltr	220ltr	220ltr	220ltr	220ltr	220ltr	220ltr	220ltr	220ltr	230ltr	230ltr	230ltr	230ltr	220ltr	220ltr	220ltr	220ltr
Gear totally independent hydraulics	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Piston totally independent hydraulics	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	■	■	■	■	■	■	■	■
3-point linkage mounting	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
Right hand or left hand build	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	□	■	■	■	■	□	□	□	□
LED rear lighting kit	-	-	-	-	-	-	-	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
Tractor power required**	25hp	40hp	60hp	70hp	90hp	95hp	100hp	90hp	95hp	100hp	110hp	100hp	120hp	140hp	160hp	120hp	140hp	120hp	130hp	140hp	150hp	140hp	150hp	160hp	170hp
Tractor weight required**	1300kg	2000kg	2250kg	2500kg	3500kg	3750kg	4000kg	3500kg	3750kg	4000kg	4500kg	4500kg	5000kg	6000kg	6500kg	5000kg	6000kg	4500kg	4750kg	5000kg	6000kg	6000kg	6250kg	6500kg	6750kg

Optional Equipment
 Standard Equipment
 - Not available

* Dependent on machine specification (including oil, excluding flailhead or attachment)
 ** Dependent on conditions

TWIGA OPTIONS

RANGE	TWIGA COMPACT	TWIGA CLASSIC	TWIGA CLASSIC	TWIGA CLASSIC	TWIGA MID	TWIGA MID	TWIGA PRO	TWIGA PRO	TWIGA ORBITAL	TWIGA FLEX
OPTIONS	TWIGA 320/420	TWIGA 470	TWIGA 500	TWIGA 545/595/640T	TWIGA 555/600	TWIGA 655T/700T	TWIGA PRO 560/650T/700T/800T	TWIGA PRO 600VFR/650VFR	TWIGA ORBITAL 606/686/726T/836T	TWIGA FLEX 670/740 800T/890T
Head float kit*	-	-	☐	☐	☐	☐	☐	☐	☐	■
Arm float kit	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
Autopilot	-	-	-	-	☐	☐	☐	☐	☐	☐
Oil cooler kit	☐	-	☐	☐	■	■	■	■	■	■
Forward reach kit	-	-	☐	☐	☐	-	-	-	-	-
Front mounting kit	☐	-	-	-	-	-	-	-	-	☐
Axle mounting system	-	-	-	-	☐	☐	☐	☐	☐	☐
Dual rotation cable rotor control	☐	■	■	■	-	-	-	-	-	-
Dual rotation electric rotor control	-	-	-	-	■	■	■	■	■	■
Narrow lane bracket	-	-	☐	☐	☐	☐	☐	☐	-	-
Debris blower kit	-	-	☐	☐	☐	☐	☐	☐	☐	☐
Hydraulic oil	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
Belt drive flailhead	-	-	☐	☐	☐	☐	☐	☐	■	☐
Flailhead hydraulic roller	-	-	☐	☐	☐	☐	☐	☐	☐	☐
Flailhead skid kit	-	-	☐	☐	☐	☐	☐	☐	☐	☐

☐ Optional Equipment
 ■ Standard Equipment
 - Not available

* Standard on Propilot builds

TWIGA ATTACHMENT OPTIONS

RANGE		TWIGA COMPACT	TWIGA CLASSIC	TWIGA CLASSIC	TWIGA CLASSIC	TWIGA MID	TWIGA MID	TWIGA PRO	TWIGA PRO	TWIGA ORBITAL	TWIGA FLEX
FLAILHEADS		TWIGA 320/420	TWIGA 470	TWIGA 500	TWIGA 545/595	TWIGA 555/600	TWIGA 655T/700T	TWIGA PRO 560/650T/700T/800T	TWIGA PRO 600VFR/650VFR	TWIGA ORBITAL 606/686/726T/836T	TWIGA FLEX 670/740 800T/890T
	CUTTING WIDTH										
	DRIVE										
MP Compact Flailhead	0.9m	Direct	☐	-	-	-	-	-	-	-	-
MP1 Flailhead	1.2m	Direct	-	☐	☐	☐	☐	☐	☐	☐	☐
		Belt	-	☐	☐	☐	☐	☐	☐	☐	■
	1.5m	Direct	-	-	☐	☐	☐	☐	☐	☐	☐
		Belt	-	-	☐	☐	☐	☐	☐	☐	☐
MP2 Flailhead	1.2m	Direct	-	-	☐	☐	☐	-	-	-	-
PB Flailhead	1.2m	Belt	-	-	☐	☐	☐	☐	☐	-	☐
		Belt	-	-	-	☐	☐	☐	☐	☐	-
	1.6m	Belt	-	-	-	☐	☐	☐	☐	-	☐
ATTACHMENTS											
HC 130 Hedgecutter	1.3m	☐	☐	☐	-	-	-	-	-	-	-
HC 150 Hedgecutter	1.5m	-	-	☐	☐	☐	☐	☐	☐	-	☐
HL 150 Cutterbar	1.5m	☐	☐	☐	☐	☐	☐	☐	☐	-	☐
HL180 Cutterbar	1.8m	☐	☐	☐	☐	☐	☐	☐	☐	-	☐
HL210 Cutterbar	2.1m	☐	☐	☐	☐	☐	☐	☐	☐	-	☐
HX 170 Cutterbar	1.7m	-	☐	☐	☐	☐	☐	☐	☐	-	☐
HX 230 Cutterbar	2.3m	-	☐	☐	☐	☐	☐	☐	☐	-	☐
HX 270 Cutterbar	2.7m	-	☐	☐	☐	☐	☐	☐	☐	-	☐
LRS 1402 Quadsaw	1.4m	☐	-	-	-	-	-	-	-	-	-
LRS 1601 Quadsaw	1.6m	☐	☐	☐	☐	-	-	-	-	-	-
LRS 2002 Quadsaw	2.0m	-	☐	☐	☐	☐	☐	☐	☐	-	☐
LRS 2401 Quadsaw	2.4m	-	-	☐	☐	☐	☐	☐	☐	-	☐
Rotary Ditcher - manual	0.6m Ø	-	-	-	☐	☐	☐	☐	☐	-	☐
Rotary Ditcher - hydraulic	0.6m Ø	-	-	-	☐	☐	☐	☐	☐	-	☐
Rotary Weedbrush	0.9m Ø	-	-	-	☐	☐	☐	☐	☐	-	☐

☐ Optional Equipment
 ■ Standard Equipment
 - Not available



📍 Green View, Salford Priors, Evesham Worcestershire, WR11 8SW, England

☎ +44 (0)1789 491860 📠 +44 (0)1789 778683

✉ enquiries@spearheadmachinery.com

🌐 www.spearheadmachinery.com

🐦 📘 Spearhead World



Spearhead
is a member of the



Alamo Group